

Modular faceplates LJ6C style

To complement the 25x50 module and faceplate range of products; Austin Taylor also manufacture a range of faceplates and accessories in the popular LJ6C (25x39mm) modular format.

Category 5e Clip Module

Shuttered clip complete with cat 5e socket.
Features joint coding to suit 568A and B standards, quick termination caps for connectors and provision for port labelling.

Blanking Clip Module


Fills unused face plate positions. Provision for labelling

Faceplates

Single and Double faceplates to support one, two or four modules. Supplied complete with fixing screws and are compatible with standard backboxes. A choice of two standard finishes available, white matt, or white gloss.

Backboxes


A range of compatible backboxes are available, with depths ranging from 18mm to 45mm to suit requirements (refer Datasheet LJ07B for additional details)

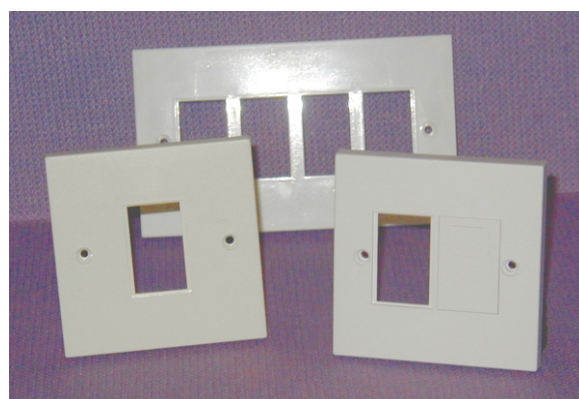

Faceplates- one, two and four gang

Technical Summary

Faceplate dimensions	
Single gang	85mm x 85mm x 10mm
Double gang	146mm x 85mm x 10mm
Module dimensions	25mm x 39mm x 34mm
Cat5e	
Faceplate / module material & colour	Fire Retardant ABS Bright white (BT 1P)
PCB materials	FR2 substrate 1.6mm with copper laminate 1oz to UL94 V0
Wire termination	Krone style IDC - colour coded for compatibility with T568A/B
RJ45 sockets	8 position, 8 contact. Gold plated contacts

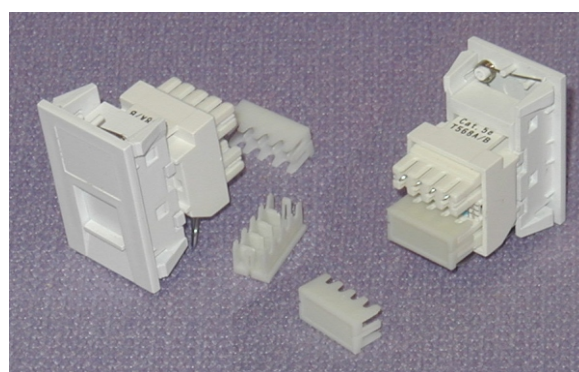

CAT 5e Clip Module

Ordering Information

Description	Part No	Supply Multiple
Faceplates Matt		
Faceplate, Single Gang, single outlet	9CP1916007	50
Faceplate, Single Gang, Twin outlet	9CP1915912	50
Faceplate, Double Gang, four outlet	9CP1915810	25
Faceplate Gloss		
Faceplate, Single Gang, single outlet	9CP2002601	50
Faceplate, Single Gang, Twin outlet	9CP2002701	50
Faceplate, Double Gang, four outlet	9CP2002801	25
Modules		
Cat 5e	9CLI193766	50
Blanking Plate	9LFU189881	25



Blanking Clip

Austin Taylor Communications Ltd
Bethesda, Gwynedd, LL57 3BX, UK

A subsidiary of
Communications Systems Inc.

UK Tel: 01248 602555
UK Fax: 01248 600370

Int. Tel: +44 1248 602555
Int. Fax: +44 1248 600370

<http://www.austin-taylor.co.uk>



BS EN ISO 9001
Reg No: Q5117